

LIFEMOUNT® Weigh Modules

Hydrostatic, Low Profile, Static Weigh Systems

Light to Medium Capacities (300 to 25,000 lb.)

Grade 304 Stainless Steel • Accuracy Class 0.05%

SERIES 60-102S

Weight Management Is Our Business™

Designed for long term reliability in harsh environments

**LIFE/5
GUARANTEE**


The LIFEMOUNT Series 60-102S provides long life and unmatched performance for static vessel weighing applications. It is designed for indoor use in low to medium weight range applications. The load cells are Hydrostatic and immune to water and electrical damage.

Features

- Water, heavy washdowns
- Explosive conditions
- Lightning strikes
- High corrosion
- Transient voltages and R.F.I.

Applications

- Tank and Hopper Scales
- Conveyor Weighing
- Custom Engineered
- Static Weigh Systems

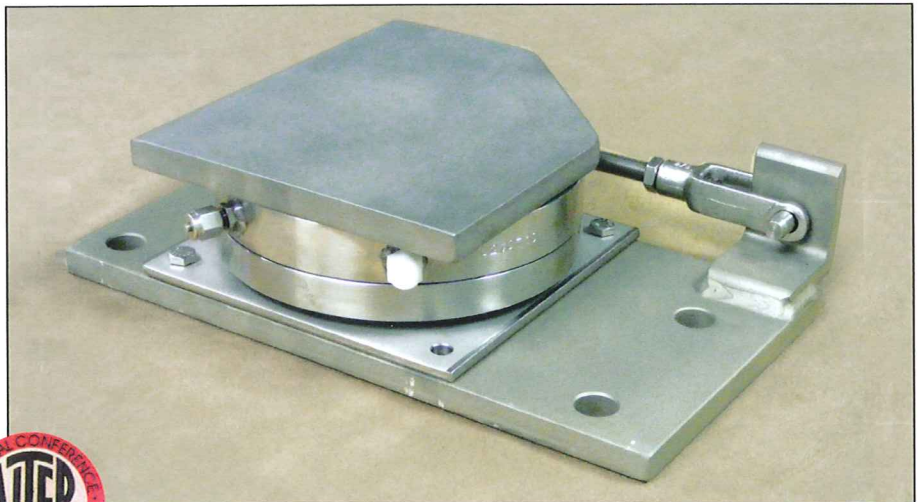

Customer Benefits

- Long Life - never again replace a load cell
- Superior Guarantee
- Lowest maintenance cost
- Field repairable load cell - reduced downtime
- NIST H-44 accuracy
- Low profile for easy installation
- High corrosion resistance - Grade 304 Stainless Steel
- Additional base and load plates not required




Guarantee: LIFE / 5

Emery Winslow guarantees the load cell for life against failure from water, lightning and power surges and further guarantees them for five (5) years against failure from defects in material and workmanship.


A SUPERIOR WEIGH MODULE WITH A SUPERIOR GUARANTEE

SPECIFICATIONS & DIMENSIONS

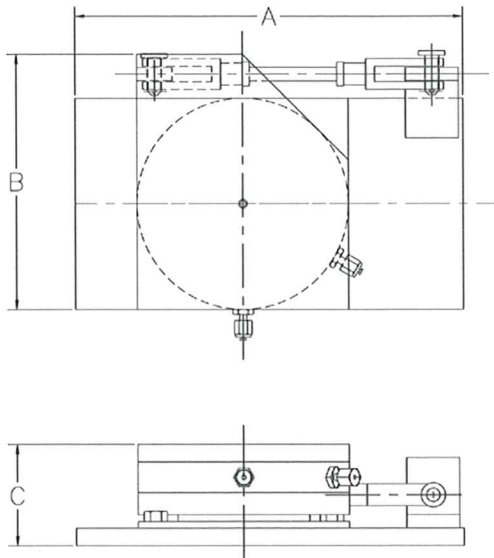

Single LIFEMOUNTS

MODEL NO.	CAPACITY RANGE (LB)	DIMENSIONS (inches)		
		A	B	C
60-102S-3	300 - 3,000	11	5.25	2.88
60-102S-10	1,000 - 10,000	11	7.25	2.88

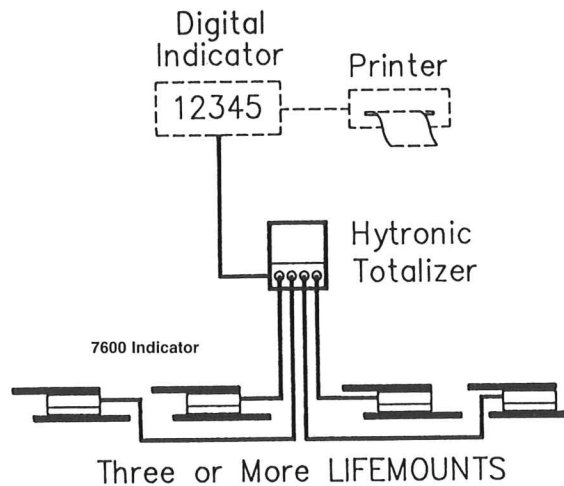

Series 60-102S Weigh System Selection

TOTAL SYSTEM GROSS CAPACITY RANGE - LB.	CORNER LIFEMOUNTS	NUMBER OF LIFEMOUNTS	SYSTEM MODEL NUMBER
300 to 3,000	60-102S-3	3	63-102S-3
400 to 4,000	60-102S-3	4	64-102S-4
500 to 5,000	60-102S-3	5	65-102S-5
1,500 to 15,000	60-102S-10	3	63-102S-15
2,000 to 20,000	60-102S-10	4	64-102S-20
2,500 to 25,000	60-102S-10	5	65-102S-25

SPECIFICATIONS

- Three, four or more LIFEMOUNTS per Weigh System
- Grade 304 stainless steel
- Utilizes the Model 102 Hydrostatic Load Cell
- Minimum system overload capacity: 200%
- Accuracy class: 0.05%
- Low profile
- Temperature range: - 20°F to 400°F
- Factory mutual approval Class I, II, III, Division 1 and 2, Group A, B, C, D, E, F and G


OPTIONS

- Grade 316 stainless steel
- Hastelloy and other alloys
- Batch controller
- Digital weight indicator
- Printer



7600E Indicator

LIFEMOUNT ORIENTATION

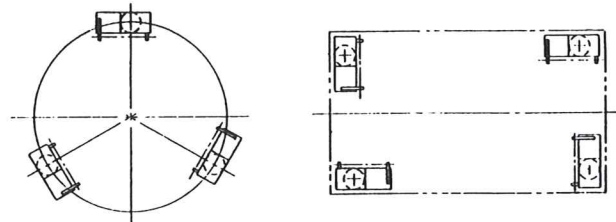

INSTRUMENTS AND CONTROLS

All that is necessary to complete a Series 60-102S Weigh System is an Emery Winslow Digital Indicator, printer and/or controller of choice.

EACH WEIGH SYSTEM CONSISTS OF:

- LIFEMOUNT Modules
- Totalizer
- Tubing and Cable
- Required Accessories
- Engineering Review
- Instruction Manual

Emery Winslow Scale Co.

73 Cogwheel Lane
Seymour, CT 06483
(203) 881-9333 Fax (203) 881-9477
www.emerywinslow.com • E-mail: homeoffice@emerywinslow.com

4530 North 25th St.
Terre Haute, IN 47805
(812) 466-5265 Fax (812) 466-1046



YOUR REPRESENTATIVE IS: