NOTES:

1. Install four (4) anchor bolts, item 4, as per manufacturers specification.
2. Set base plate item 1 to proper height and level as specified, using greased leveling screws. Remove plate and apply a layer of grout in plate area slightly higher than required. Bolt base plate down to preset screws, squeezing out excess grout. Double check height and level. Remove leveling screws after approximately 2 to 3 hours.
3. Place scale assembly into pit with removable deck installed. Check for even gap between decks and pit coping all around scale.
4. Remove decks and transfer drill holes for four (4) anchor bolts, item 4. Install anchor bolts as per manufacturer's specification.
5. Tighten anchor bolts.

ITEM NO.	DESCRIPTION	QTY	MATERIAL	UNIT WT.	PART NO. SIZE	WT.
1	BASE PLATE	4	SS 304	7.65	B-33340 (0.38 X 6 X 9)	20.5
2	LEVELING SCREW	12	CS		0.500-13UNC X 4.00	
3	NELSON STUD	18	CS		101-053-003 0.50 X 4.13 X H4L	OPT
4	ANCHOR BOLT 0.50 X 5.50	8	SS 304		KB11304SS112-512 HILTI OR EQUAL	OPT
5	GROUT (NON-SHRINKING)	A/R			FIVE STAR PRODUCTS, INC., FAIRFIELD, CT., 06430 OR EQUAL	OPT
6	COPING	2	SS 304		2 X 2 X 0.25 X 76.75	OPT
7	COPING	2	SS 304		2 X 2 X 0.25 X 60.75	OPT

AVAILABLE AS AN OPTION = OPT

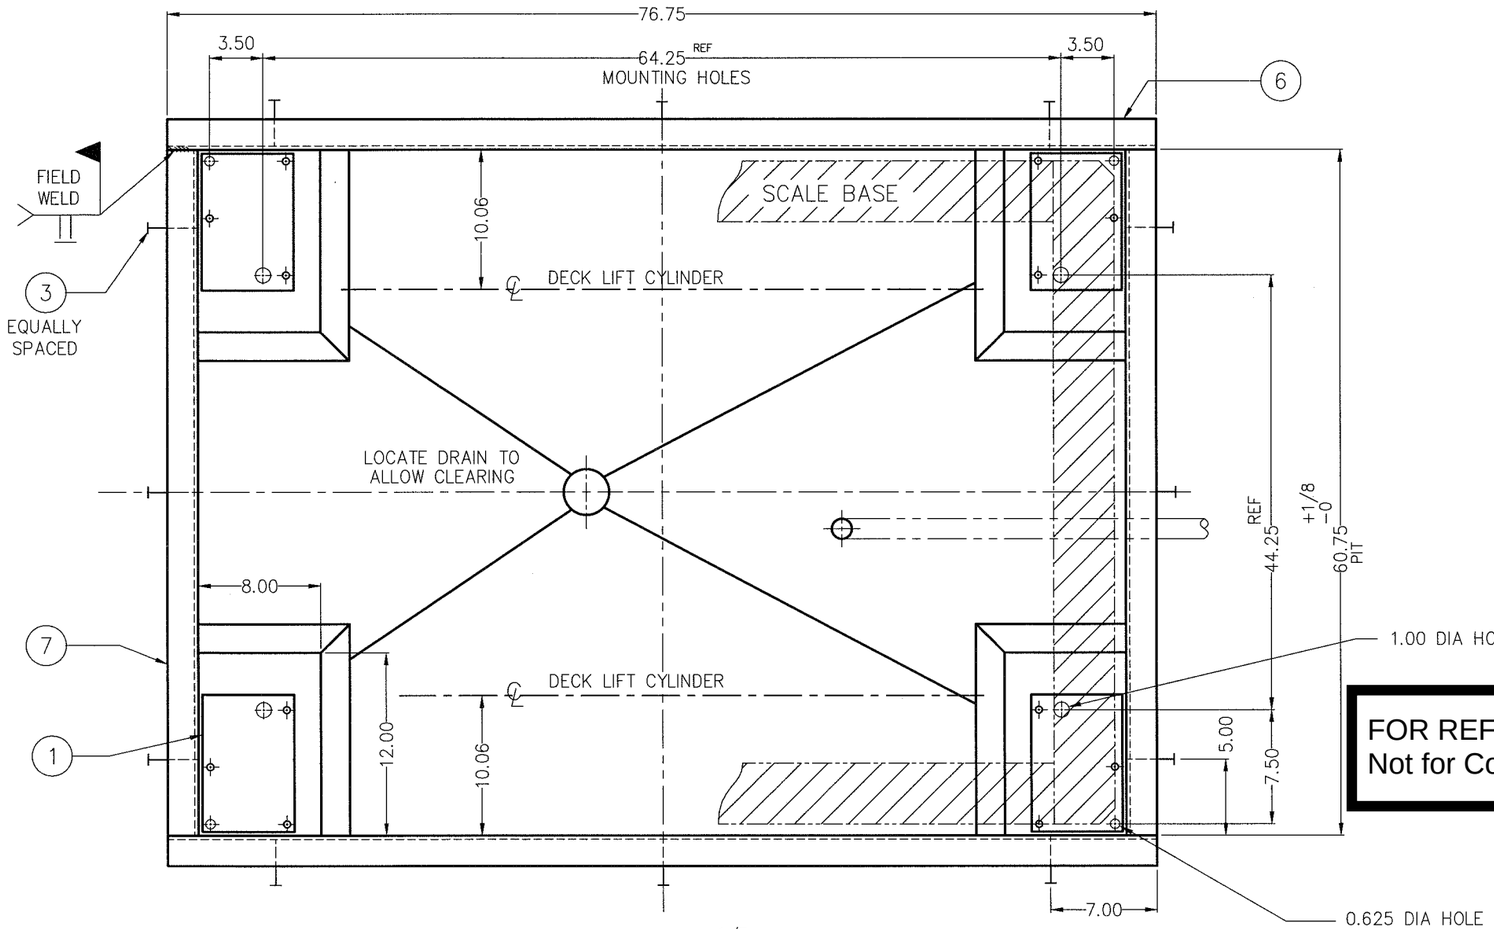

FOR REFERENCE ONLY
Not for Construction

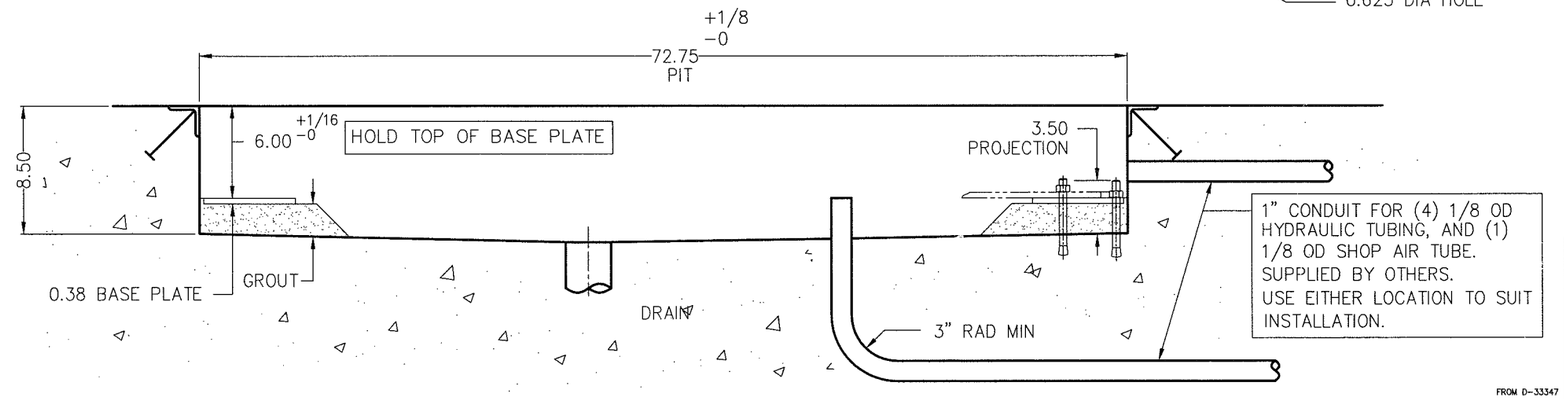

FROM D-33347

PITCHED FLOOR INSTALLATION

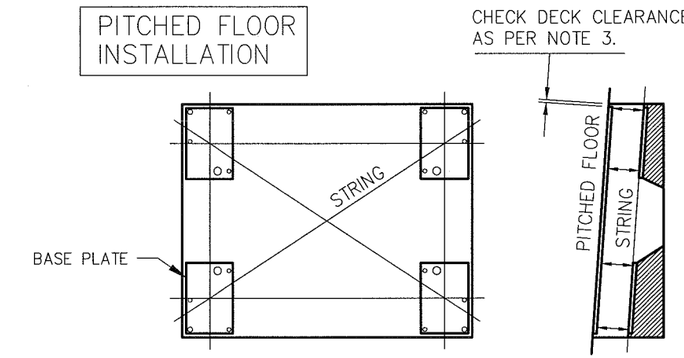

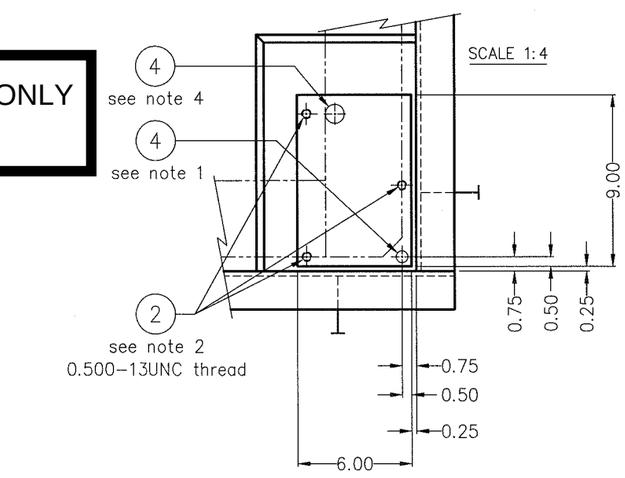

LTR	REVISION	DATE	BY
A	ITEMS 2,4 CHANGED	11/96	JDS

THIS DRAWING IS THE PROPERTY OF EMERY WINSLOW SCALE COMPANY SEYMOUR, CONNECTICUT. THE INFORMATION CONTAINED HEREIN IS CONFIDENTIAL AND IS NOT TO BE USED OR DISSEMINATED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF EMERY WINSLOW SCALE COMPANY.

ALL SHARP CORNERS AND EDGES TO BE BROKEN

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES

DECIMALS XX = ± .03 XXX = ± .005 | FRACTIONS ± | ANGLES ±

DRAWN JDS DATE 8/14/95

CHECKED DATE

ACAD FILENAME: AC00298

LAYERS USED: 1,30,32

EMERY WINSLOW SCALE COMPANY
SEYMOUR, CT U.S.A TERRE HAUTE, IN.

PIT ARRANGEMENT
MODEL 709-56
WITH PNEUMATIC DECK LIFTING

SCALE NOT TO SCALE | FIRST USED ON | DRAWING NO. D-34594 | REV. A